


80SV II ZW M12 Female




| A Type 80 Cable Holder with an M12 Female Thread | |
|--|--------------------------------------|
| Part Nos | T37683 |
| Holder Diameter | Ø40mm |
| Thread | M12 |
| Thread Depth | 20mm |
| Wire Diameter | Ø6mm & Ø8mm |
| WLL | 6mm Wire - 135Kg 8mm Wire - 240Kg |
| Weight | 0.94Kg |

Dimensions in mm

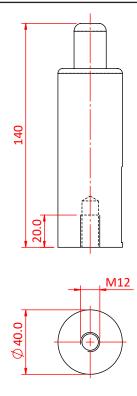


DIMENSIONS ARE A GUIDE ONLY AND MAY VARY

Doughty Engineering Ltd - Crow Arch Lane, Ringwood, Hampshire, BH24 1NZ, UK +44 (0) 1425 478961, sales@doughty-engineering.co.uk - www.doughty-engineering.co.uk

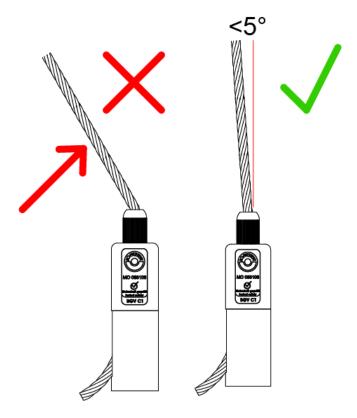

The wire rope must exit in line with the Cable Holder.
The maximum angle allowed is 5 degrees.



Reutlinger Cable Holders can be used up to an angle of 45 degrees.

The wire rope must not exceed 5 degrees when exiting the cable holder.

Doughty Engineering Ltd - Crow Arch Lane, Ringwood, Hampshire, BH24 1NZ, UK +44 (0) 1425 478961, sales@doughty-engineering.co.uk - www.doughty-engineering.co.uk