

SR25mp GEN 2

MATCHED PAIR OF

DRUM OVERHEAD MICROPHONES

EARTHWORKS AUDIO

Follow us on social media **@EarthworksAudio**
For more information, please visit
earthworksaudio.com or call 1-603-654-2433.

Thank you for purchasing the Earthworks SR25 Gen 2 Drum Microphone

YOUR PURCHASE INCLUDES

2 SR25 Gen 2 Microphones
2 Microphone Bags
2 Microphone Clips
2 Foam Windscreens

GETTING STARTED

The SR25 is a condenser microphone with active electronics. This means:

- Its output level will be naturally higher than many of the dynamic microphones that it may be replacing. It is not uncommon to need to reduce gain if you were previously using a dynamic microphone.
- You will need to engage phantom power on your interface or preamp. Pro Tip: It's always a good idea to plug in a condenser microphone while phantom power is off and the channel is muted. After engaging phantom power, give the microphone a short time to settle before unmuting.

PROPER MAINTENANCE

To guarantee your microphone provides years of performance, follow these guidelines:

- Avoid touching the front protective screen.
- Never attempt to disassemble the microphone.
- Avoid extreme heat and condensing humidity. Allow the microphone to warm up when bringing it in from the cold.
- Rough handling may damage the microphone even if no markings are visible

IMPORTANT NOTICE

The small tip on many of our microphones allows them to capture the highest frequencies of your sound. Please be gentle and considerate when handling the microphones with these tips.

TROUBLESHOOTING

If you encounter issues while using your Earthworks Audio microphone, please make sure that:

- Your microphone is connected to an active power supply.
- Phantom power is being supplied to the microphone.
- Your microphone and XLR cable are well connected.
- The microphone is positioned at an appropriate distance from the sound source.
- External noise in your recording environment is kept to a minimum.
- Your recording space is at room temperature and free of dust.

If your issue persists after checking, please contact us via our website.

SPECIFICATIONS

Frequency Response
20Hz - 25kHz

Polar Pattern
Supercardioid

Sensitivity
-36 dBV/Pa (15.8 mV/Pa)

Power Requirements
48V, 6mA

Peak Acoustic Input
148dB SPL


Output
XLR

Minimum Load Impedance
1000 Ohms

Noise
20 dBSPL (A-Weighted)

Dimensions
4.14 in x 0.860 in / 105.15 mm x 21.84 mm

Weight
0.25 lbs / 0.10 Kg each

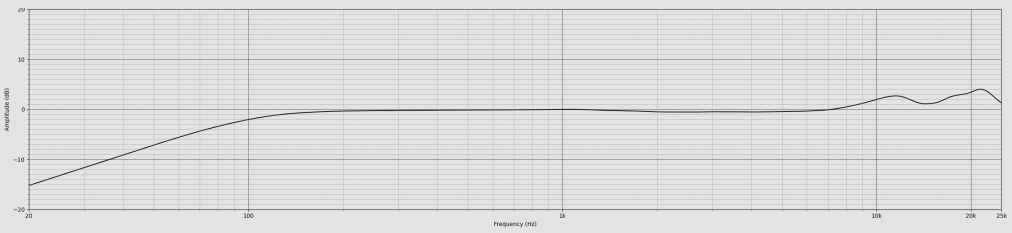

DISCLAIMER

The specifications listed are for the SR25mp Gen 2. If you have the SR25mp Gen 1, please refer to the Gen 1 user guide on our website.

COMPLIANCE REQUIREMENTS

Hereby, Earthworks Inc. declares that this product has been determined to be in compliance with UKCA requirements.

The full text of the UK declaration of conformity is available at the following site:

https://earthworksaudio.com/support/documents/uk

Hereby, Earthworks Inc. declares that this product has been determined to be in compliance with European Union requirements.

The full text of the EU declaration of conformity is available at the following site:

https://earthworksaudio.com/support/documents/eu

WARRANTY

All Earthworks® products carry a limited warranty (parts and labor). Please register your warranty at: **earthworksaudio.com/register**. If you have any problems with your Earthworks products, please contact our warranty/repair department by email at: **service@earthworksaudio.com.**

NOTE

This warranty only applies to Earthworks microphones purchased brand new. For microphones purchased/received second-hand, please contact us via our website.

Version 3.2-SR25mp Gen 2, Last Updated 6/1/24
37 Wilton Rd. Milford, NH 03055
info@earthworksaudio.com
© 2024 Earthworks Audio, Inc

EARTHWORKS AUDIO