



ARGO 6 FX

PHOTOMETRY



AYRTON

Digital Lighting



Total Flux	13,110 lm (Sphere, fan mode Stage, wide zoom)
-------------------	---

CCT White chip	7600 K (±500 K)
-----------------------	-----------------

Ra White chip	70 (±2)
----------------------	---------

TLCI White chip	44
------------------------	----

TM-30 White chip	Rf: 66.8 Rg: 97.4
-------------------------	-------------------

Fan Mode	Noise Level (dBA)	by Goniometer (lm)	by Sphere (lm)
Auto	47.1	11,310	12,893
Stage	52.1	11,500	13,110
Silence	40.8	8,088	9,220
Super Silence	34.8	5,366	6,117

Note: noise measured @1m distance, static status, ambient 31 dBA.


Voltage / Power	100-240V, 50-60Hz	950 W
------------------------	-------------------	-------

Fixture Dimension / Weight	435 x 536 x 280 mm	23.2 kg
-----------------------------------	--------------------	---------

Packing Dimension / Weight	500 x 670 x 365 mm	32.2 kg
-----------------------------------	--------------------	---------

MIN ZOOM

BEAM OPENING

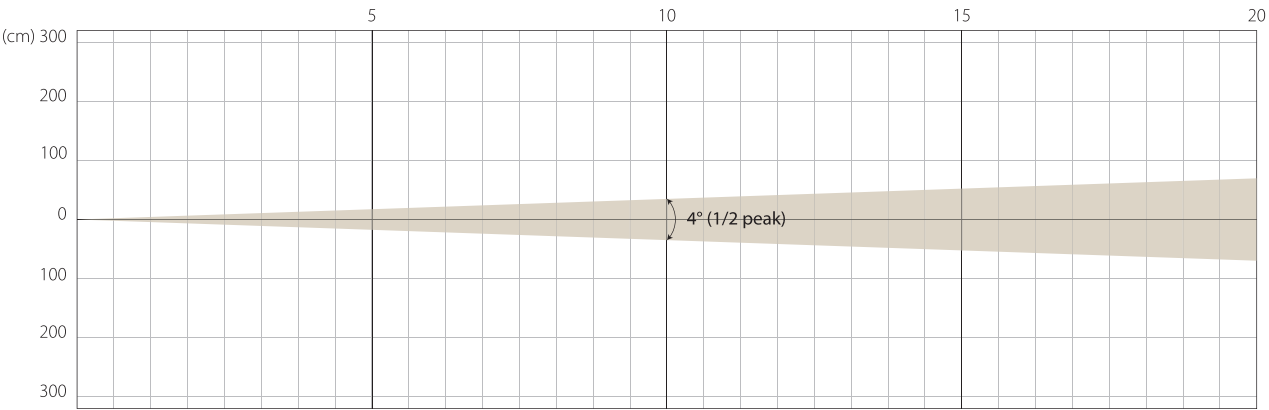


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Red	8155	0,35	2039	0,7	906	1,05	510	1,4
Green	16893	"	4223	"	1877	"	1056	"
Blue	4577	"	1144	"	509	"	286	"
White	25668	"	6417	"	2852	"	1604	"
RGB+W	47686	"	11921	"	5298	"	2980	"

MAX ZOOM

BEAM OPENING

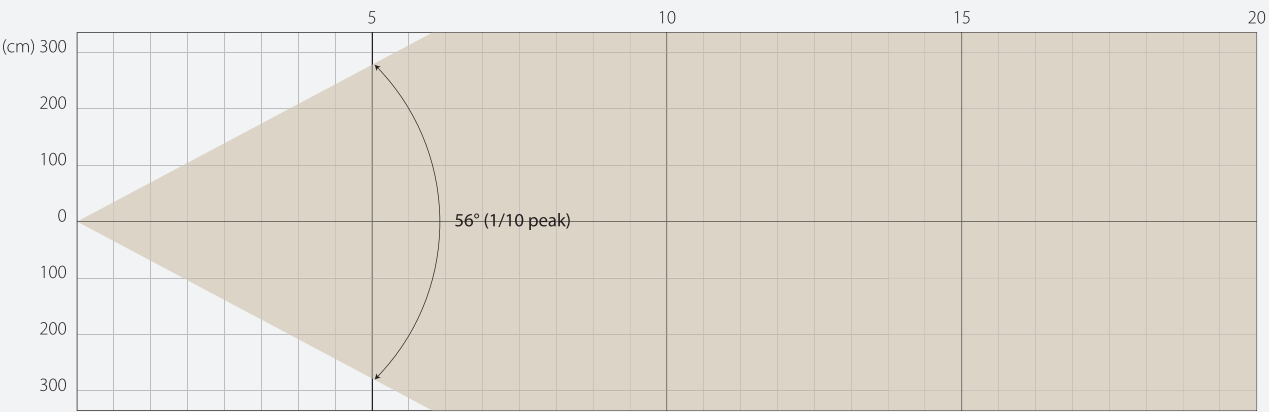


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Red	163	5,54	41	11,09	18	16,63	10	22,17
Green	338	"	84	"	38	"	21	"
Blue	96	"	24	"	11	"	6	"
White	546	"	136	"	61	"	34	"
RGB+W	992	"	248	"	110	"	62	"

STAGE MODE

MIN ZOOM

BEAM OPENING

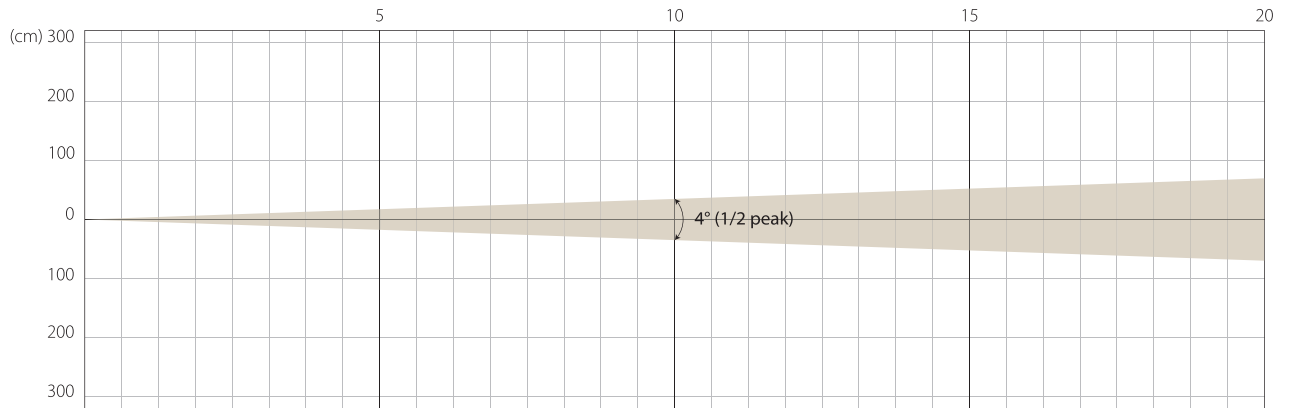


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Red	8342	0,35	2085	0,7	927	1,05	521	1,4
Green	18188	"	4547	"	2021	"	1137	"
Blue	4652	"	1163	"	517	"	291	"
White	27046	"	6761	"	3005	"	1690	"
RGB+W	46860	"	11715	"	5207	"	2929	"

MAX ZOOM

BEAM OPENING

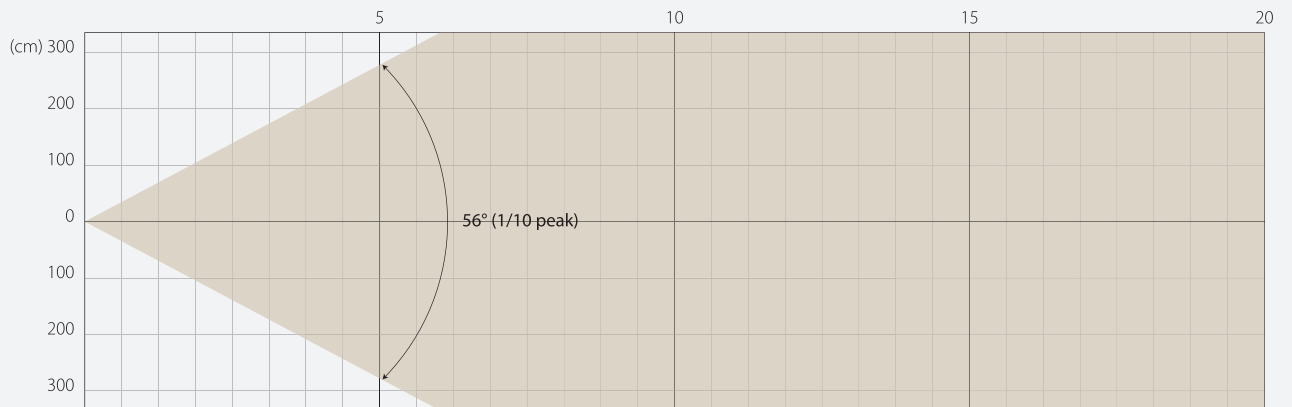


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Red	166	5,54	41	11,09	18	16,63	10	22,17
Green	346	"	87	"	38	"	22	"
Blue	98	"	25	"	11	"	6	"
White	550	"	138	"	61	"	34	"
RGB+W	1003	"	251	"	111	"	63	"

SILENCE MODE

MIN ZOOM

BEAM OPENING

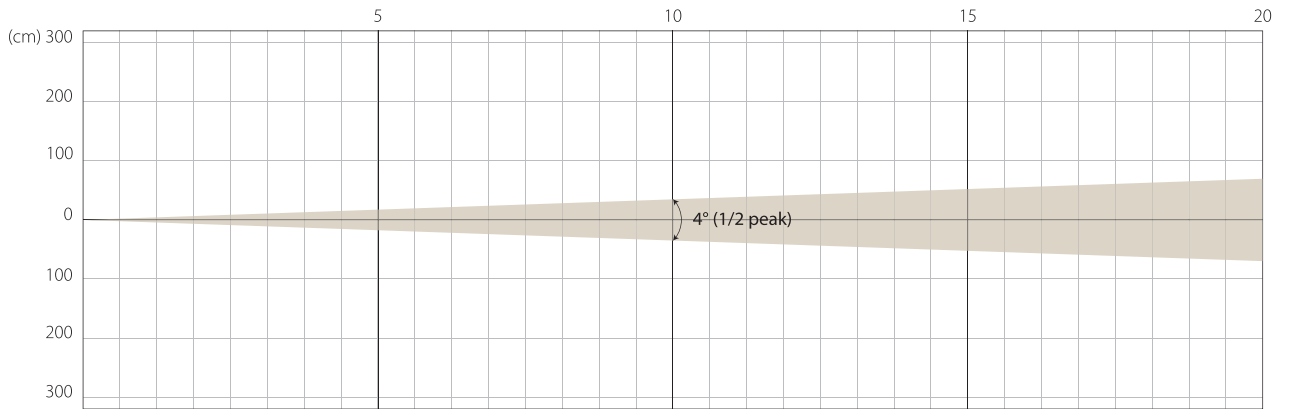

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
RGB+W	33375	"	8344	"	3708	"	2086	"

MAX ZOOM

BEAM OPENING




INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
RGB+W	709	"	177	"	79	"	44	"

SUPER SILENCE MODE

MIN ZOOM

BEAM OPENING

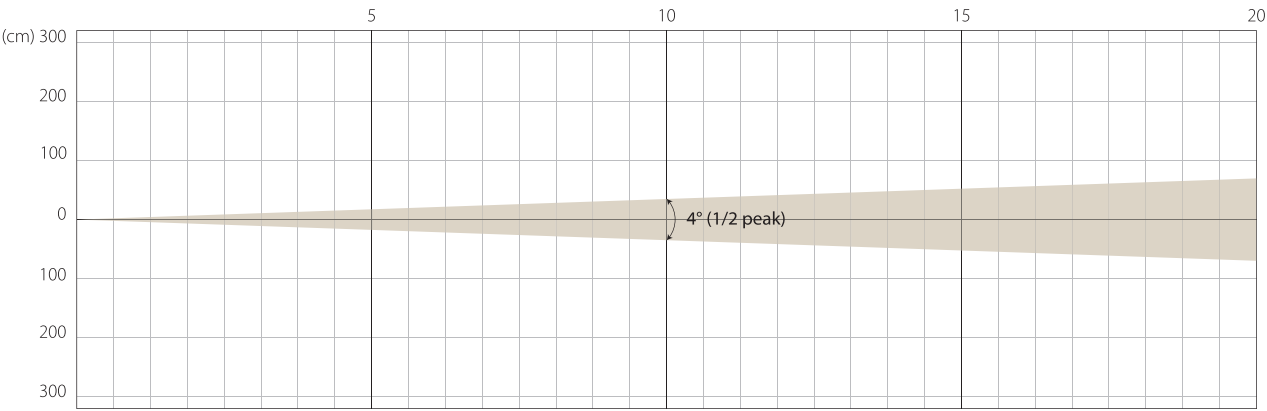


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
RGB+W	22733	"	5683	"	2526	"	1421	"

MAX ZOOM

BEAM OPENING

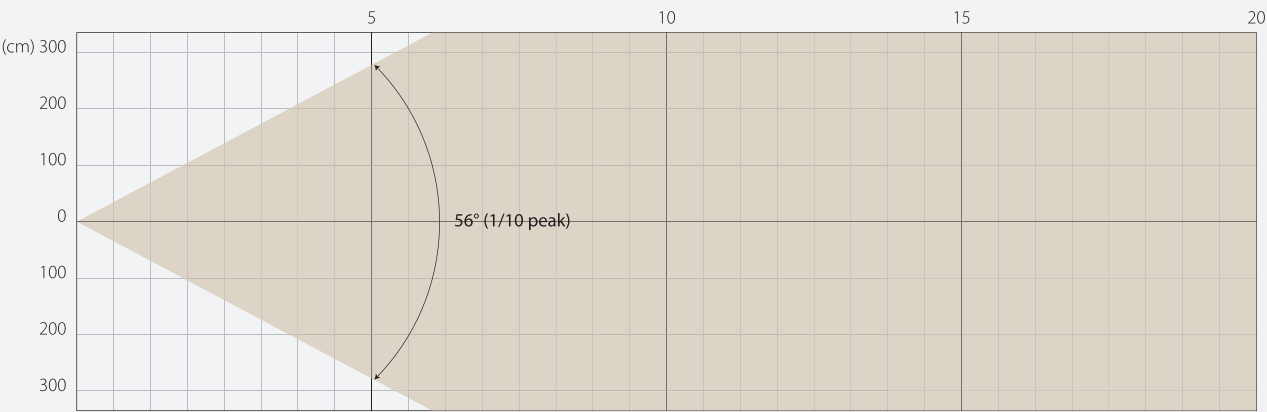

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
RGB+W	471	"	118	"	52	"	29	"



AYRTON
Digital Lighting